

PHSZ

2531A.B
2533A.B
4031A.B
4033A.B
7533A.B

A = 50HZ , B = 60HZ

PH2

PH2-3/3AS5.4
PH2-3/3AT5.4
PH2-3/3AT5.7
PH2-2/2AS6.4
PH2-2/2AT6.4
PH2-2/2AT6.7



A = Series
S = 110V , T = 220V
5 = 50HZ , 6 = 60HZ
4 = 400W(Output)
7 = 750W(Output)

■应用范围

- 冷热水循环(0 ~ 80°C)
- 超音波洗净设备

■泵浦特点

- 全封闭式外扇冷却马达
- PH2为高扬程型
- PHSZ为大流量型
- 接液部为全不锈钢板冲压制品,并搭配耐磨SIC轴封,效率高,噪音低,应用范围广

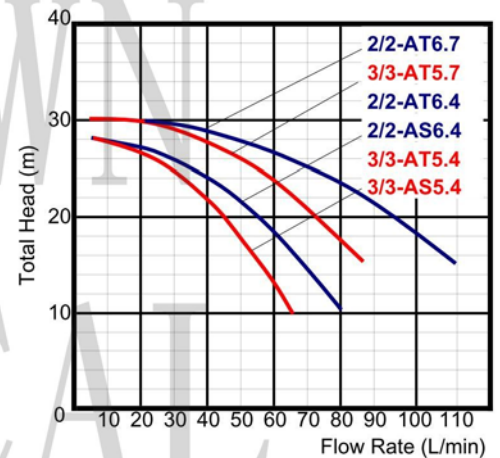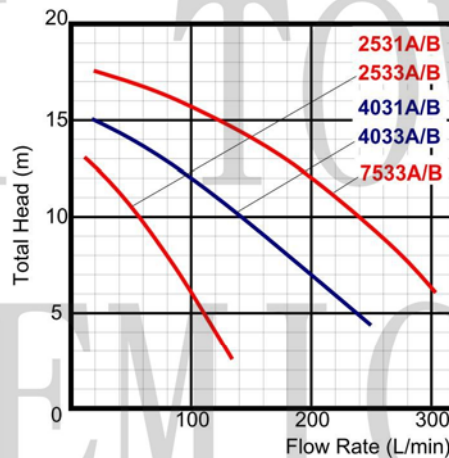

■型号末码：1表示单相电·3表示三相电

(50 / 60HZ)

Model	Item	Frequency	Rated Output	Rated Voltage	Diameter	Flow Rate	Total Head	Rated Consumption	Rated Current	Motor Protector	Weight
		HZ	W	V	A (mm)	L / min	m	W	A		kg
PHSZ-2531A·B		50/60	250	110	25 (1B)	34·62	12·9	400	5.8	Manual	12.1
PHSZ-2533A·B		50/60	250	220	25 (1B)	34·62	12·9	400	1.6	Manual	11.1
PHSZ-4013A·B		50/60	400	110	40 (1½B)	80·150	12·9	700	8.6	Manual	13.2
PHSZ-4033A·B		50/60	400	220	40 (1½B)	80·150	12·9	670	3.0	Manual	12.5
PHSZ-7533A·B		50/60	750	220	40 (1½B)	190·270	12·9	1100	4.5	Manual	13.2
PH2-3/3AS 5.4		50	400	110	25	35·50	23·18	601	7.5	Manual	14.9
PH2-3/3AT 5.4		50	400	220	25	35·50	23·18	550	2.3	Manual	14.2
PH2-3/3AT 5.7		50	750	220	40	65·80	23·18	700	3.5	Manual	15.0
PH2-2/2AS 6.4		60	400	110	25	40·60	23·18	700	7.8	Manual	14.2
PH2-2/2AT 6.4		60	400	220	25	40·60	23·18	601	2.2	Manual	13.5
PH2-2/2AT 6.7		60	750	220	40	80·100	23·18	901	3.6	Manual	14.3