

# 省電高效率自吸式泵浦（海水及一般廢水用）

## PSPZ



### ■應用範圍

- 海水養殖業
- 一般廢水輸送



### ■泵浦特點

- 此一般市購品噪音值低15dB  
最佳工作點的泵浦效率提升47%，馬達耗電量降低56%
- 全系列馬達內建過載保護開關及  
搭配TEFC馬達，壽命長，可靠度高
- 主要接液材質：強化樹脂+SUS316

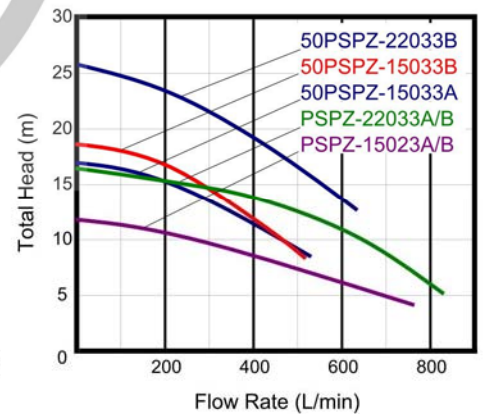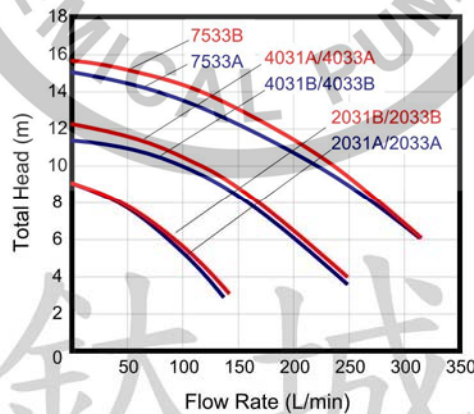

■型號末碼：1表示單相電・3表示3相電

(50 HZ)

Item Model	Motor Reted Output	Diameter	Suction Height (max)	Total Head	Flow Rate	Reted Consumption	Protector	Weight
	W	A (mm)	m	m	L / min	W		
25PSPZ-2031A	250	25 (1B)	6.0	5・7	109・74	380	Manual	15.0
25PSPZ-2033A	250	25 (1B)	6.0	5・7	104・69	310	Manual	14.0
40PSPZ-4031A	400	40 (1½B)	6.5	7・9	185・141	580	Manual	16.0
40PSPZ-4033A	400	40 (1½B)	6.5	7・9	187・143	580	Manual	15.0
40PSPZ-7533A	750	40 (1½B)	6.5	8・12	268・160	900	Manual	17.0
50PSPZ-15033A	1500	50 (2B)	6.5	14・16	287・168	1580	Manual	36.0
PSPZ-15023A	1500	80 (3B)	5	5・10	700・300	1800	Manual	35.0
PSPZ-22033A	2200	80 (3B)	5	7・10	800・650	2950	Manual	37.0

■型號末碼：1表示單相電・3表示3相電

(60 HZ)

Item Model	Motor Reted Output	Diameter	Suction Height (max)	Total Head	Flow Rate	Reted Consumption	Protector	Weight
	W	A (mm)	m	m	L / min	W		
25PSPZ-2031B	250	25 (1B)	6.0	5・7	118・86	420	Manual	15.0
25PSPZ-2033B	250	25 (1B)	6.0	5・7	111・75	370	Manual	14.0
40PSPZ-4031B	400	40 (1½B)	6.5	7・9	187・139	650	Manual	16.0
40PSPZ-4033B	400	40 (1½B)	6.5	7・9	181・131	570	Manual	15.0
40PSPZ-7533B	750	40 (1½B)	6.5	8・12	274・181	930	Manual	17.0
50PSPZ-15033B	1500	50 (2B)	6.5	14・17	334・222	2700	Manual	36.0
50PSPZ-22033B	2200	50 (2B)	6.5	20・25	383・110	2650	Manual	38.0
PSPZ-15023B	1500	80 (3B)	5	5・10	700・300	2200	Manual	35.0
PSPZ-22033B	2200	80 (3B)	5	7・10	800・650	3150	Manual	37.0