

鈹金銅冷熱給水泵浦

PBG

- PBGU-331A.B
- PBGU-541A.B
- PBG-531A.B
- PBG-1031A.B
- PBG-1033A.B
- PBG-2011B
- PBG-2013B





應用範圍

- 冷熱水循環(0~90°C)
- 超音波洗淨設備
- 洗碗機等廚房衛浴設備

泵浦特點

- 接液部採用鈹金銅及SUS等不生銹金屬，免除生銹顧慮
- 管道上按裝，節省空間

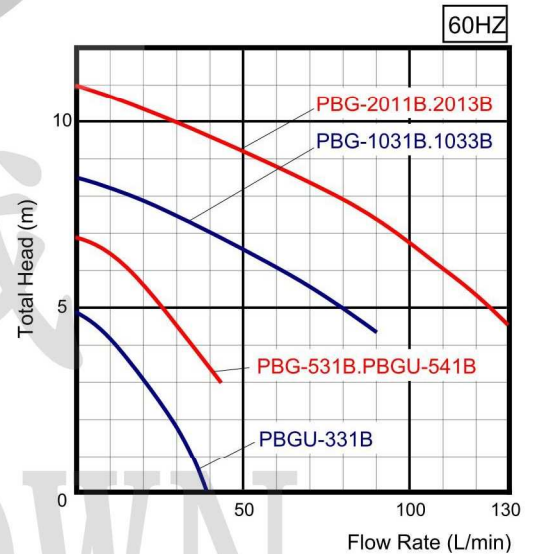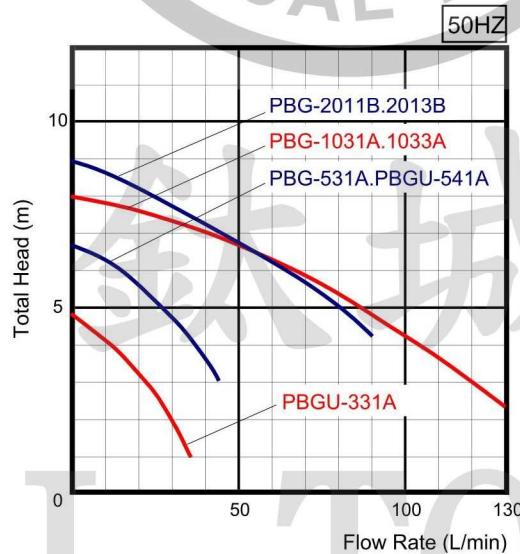

■ 型號末碼：1表示單相電 · 3表示3相電

(50 HZ)

Model	Item	Rated Output	Diameter	Flow Rate	Total Head	Rated Consumption	Motor Protector	Weight
		W	A (mm)	L / min	m	W		kg
PBGU-331A		30	20 (3/4B)	12 • 21	4 • 3	71	Automatic	5.0
PBGU-541A		50	20 (3/4B)	25 • 35	5 • 4	92	Automatic	5.0
PBG-531A		50	20 (3/4B)	25 • 35	5 • 4	92	Automatic	5.0
PBG-1031A		100	25 (1B)	45 • 80	7 • 5	200	Automatic	6.9
PBG-1033A		100	25 (1B)	45 • 80	7 • 5	200	Automatic	6.7
PBG-2011B		150	32 (1¼B)	50 • 120	6.5 • 3	230	Automatic	8.5
PBG-2013B		150	32 (1¼B)	50 • 120	6.5 • 3	230	Manual	8.5

PBG：牙口法蘭

PBGU：牙口由令

■ 型號末碼：1表示單相電 · 3表示3相電

(60 HZ)

Model	Item	Rated Output	Diameter	Flow Rate	Total Head	Rated Consumption	Motor Protector	Weight
		W	A (mm)	L / min	m	W		kg
PBGU-331B		30	20 (3/4B)	12 • 21	4 • 3	71	Automatic	5.0
PBGU-541B		50	20 (3/4B)	25 • 35	5 • 4	97	Automatic	5.0
PBG-531B		50	20 (3/4B)	25 • 35	5 • 4	97	Automatic	5.0
PBG-1031B		100	25 (1B)	40 • 80	7 • 5	195	Automatic	6.9
PBG-1033B		100	25 (1B)	40 • 80	7 • 5	195	Automatic	6.7
PBG-2011B		200	32 (1¼B)	50 • 125	8.5 • 5	310	Automatic	8.5
PBG-2013B		200	32 (1¼B)	50 • 125	8.5 • 5	310	Manual	8.5

PBG：牙口法蘭

PBGU：牙口由令